



**Mildew &
Sulfide Stain
Resistant
Finish**



Available in 4 Stock Colors

ROOF SHIELD VINYL ACRYLIC ROOF PAINT

Roof Shield Vinyl Acrylic Roof Paint is a specially formulated vinyl acrylic coating designed for use on a variety of roof substrates. Its heavy bodied formula significantly contributes to resisting the hot infrared rays of the sun, thus reducing



inside temperatures as well as lowering your cooling costs in the summer.

Reduces Summer Cooling Costs It provides a superior finish that not only has excellent durability, but is mildew resistant and is easy to apply.

Roof Shield Features:

- Superior Weather Resistance
- Mildew & Sulfide Stain Resistant
- Algae Resistant
- Many Different Applications
- VOC Compliant
- Contains No Lead and Chromate Pigments
- Easy to Apply

————— Your Richard's Distributor —————



Roof Shield

Vinyl Acrylic Roof Paint




**For cement &
gravel roofs**

SURFACE PREPARATION

The entire surface area should be clean, dry, sound and free from all dirt, grease, oils, waxes, mildew and any other contaminants. For best results, it is recommended to pressure wash the surface area. Surface areas affected by mildew should be thoroughly cleaned. See label specifications for suggested cleaning methods and suggested sealers for chalky surfaces. Remove any loose scale, chalked, cracking, flaking and peeling paint by hand scraping, sanding, wire brushing and/or power tool cleaning, such as high pressure water blasting. Repair/replace any damaged and/or delaminated surface areas and repair all leaks.

PRODUCT APPLICATION

Richard's Roof Shield Acrylic Roof Paint is suitable for application to a variety of properly prepared surfaces such as, Gravel Roofs, Barrel Cement Tile Roofs and Slate Roofs (not recommended for Clay Roofs). Application is easily achieved with a quality brush, roller cover, or airless spray equipment. For best results, it is recommended to apply two (2) finish coat applications. For more detailed application instructions, see label specifications on can. Previously painted surfaces that are still chalky after thorough cleaning should be properly sealed. Apply coating as it comes from the container. Thinning is not recommended. Avoid paint application outside when weather is threatening, or late in the afternoon when there is threat of moisture condensing on wet paint. Apply when surface and ambient temperatures are above 55° and below 90°.

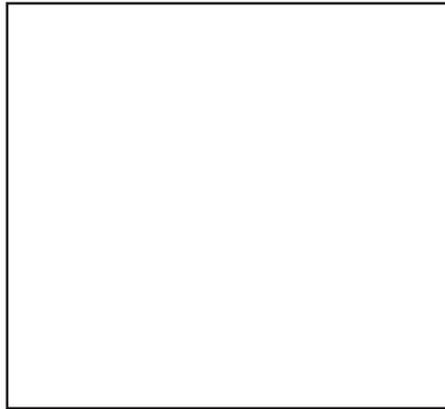

White



Venezuelian Tile



Terra Cotta



Spanish Red

Please Note: Color representation may differ slightly from the actual paint. Not recommended for application on clay tiles.

